

DUCHESNE COUNTY MONUMENT SURVEY RECORD


T3S R8W

LINE	BEARING	DISTANCE
L1	S 28°03'20" W	19.22'
L2	N 62°31'27" W	25.51'
L3	N 26°25'44" E	28.61'


SEC 32	SEC 33
SEC 5	SEC 4
T4S	
U.S.B.&M.	

Z-9

	4	



SCALE: 1"=30'

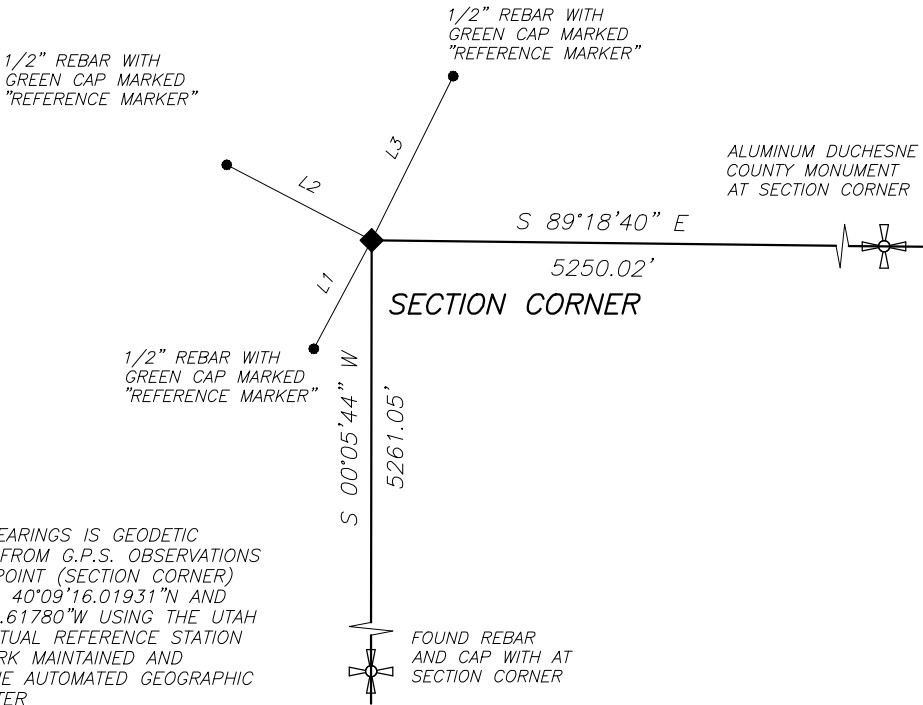

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC  
NORTH DERIVED FROM G.P.S. OBSERVATIONS  
AT A CONTROL POINT (SECTION CORNER)  
LOCATED AT LAT. 40°09'16.01931"N AND  
LONG. 110°45'51.61780"W USING THE UTAH  
STATE G.P.S. VIRTUAL REFERENCE STATION  
CONTROL NETWORK MAINTAINED AND  
OPERATED BY THE AUTOMATED GEOGRAPHIC  
REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A REBAR WITH ALUMINUM CAP  
IN MOUND OF STONES WITH ORIGINAL  
MARKED STONE SET ALONG SIDE AT  
POSITION OF SECTION CORNER



MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES  
ESTABLISHED TO PERPETUATE THE ORIGINAL  
LOCATION OF THE CORNER

SET 1/2"x24" REBARS WITH PLASTIC CAPS AS  
SHOWN REFERENCING THE CORNER AS FOUND

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7231052.614  
E: 1835487.339  
NAVD88 EL: 7318.90'

LATITUDE: 40°10'08.48005" N  
LONGITUDE: 110°48'06.96413" W  
ELLIPSOID HEIGHT: 7265.79'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300040S0080W0\_300700



PHOTO OF CORNER FACING NORTH

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do  
hereby certify that I have performed or reviewed the work done on the  
diagrammed corner as reported on this recordation form and approve same

Date 13 MAY '19

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

